

8FB/8FBH/8FBJ MODELS

# 48V & 80V ELECTRIC PNEUMATIC



3000 - 7000 LBS.

SPECIFICATIONS



8FBH15-25 | 8FB30 | 8FBJ35

CLASS

1

ELECTRIC MOTOR RIDERS

ToyotaForklift.com

## 48V & 80V ELECTRIC PNEUMATIC (8FB/8FBH/8FBJ MODELS)

CAPACITY  
**3000 - 7000 LBS.**

LOAD CENTER  
**24 IN.**

WHEELBASE  
**55.5-71 IN.**

### INDUSTRIES



Lumber



Brick, Block  
& Pipe



Concrete



Distribution



Retail

## STANDARD FEATURES

### SUPPORT

- System of Active Stability™ (SAS)
  - Active control rear stabilizer
  - Active mast function controller
- Operator presence sensing system (OPSS)
- Double-action parking brake
- Emergency power off
- Orange seatbelt

### PERFORMANCE

- 48-volt electrical system (8FBH15-25)
- 80-volt electrical system (8FB30/8FBJ35)
- AC controller
- AC drive & lift motors
- 3-way hydraulic control valve
- Load sensing power steering (LSPS)
- Regenerative braking
- LCD digital multifunction display
  - Speedometer
  - Clock
  - Multifunction hour meter
  - Battery capacity indicator (w/lift interrupt)
  - Parking brake indicator
- Power select functions (S.P.H.)
- Overheat warning indicator
- Self-diagnostics
- Built-in analyzer

### BODY/EXTERIOR DESIGN

- Wide view 2-stage mast (V)
- ITA class II hook-type carriage<sup>2</sup>
- ITA class III hook-type carriage<sup>1</sup>
- 48" Load backrest
- Overhead guard
- Seat-side storage area
- Drawbar pin
- Polycarbonate overhead guard caps
- Adjustable front headlights
- Tapered forks

### OPERABILITY & ERGONOMICS

- Fully adjustable ORS vinyl suspension seat
- Heavy-duty non-slip floor mat
- Memory tilt steering column
- Left hand assist grip
- Wide floorboard with low step in height

### SERVICEABILITY

- Maintenance-free AC motors
- Battery compartment hood assist dampener
- Easy access no-tools floorboard

<sup>1</sup> Available only on the 8FBH15-25 models.

<sup>2</sup> Available only on the 8FB30/8FBJ35 models.

## OPTIONAL EQUIPMENT

### LOAD HANDLING

- Full-free lift two-stage mast (FV)
- Full-free lift three-stage mast (FSV)
- Fully oil-charged lift cylinder
- Wide carriage options
- High load backrests
- Without load backrest
- Without forks
- Tilt cylinder boots
- Hydraulic accumulator

### LOAD HANDLING (HOSE & VALVE ASSEMBLY)

- 3-way valve (with 3rd function hosing)
- 4-way valve (with 3rd & 4th function hosing)
- Integral sideshifter
- Clamp release interlock - 3rd lever
- Clamp release interlock - 4th lever
- Clamp release interlock - 3rd/4th lever

### LIGHTS, INDICATORS, & MISC

- LED front combination lights with headlights & guard
- LED rear combination lights
- LED rear working light, ON/OFF switch type
- LED rear working light (user selectable operation)
- LED blue light (user selectable operation)
- LED Strobe Light
- Forward & reverse chime (travel chime)
- Back-up chime
- Back-up buzzer
- Smart alarm (adjustable volume back up buzzer)
- Seat belt interlock
- 12-volt power supply
- Steering wheel with knob

### BODY & CHASSIS

- Canvas cab with wiper
- Front windshield with wiper & washer
- Slope sensing auto-power mode selector
- Rear view mirrors (left & right sides)
- Rear pillar assist grip w/horn
- Pencil and tape holder
- Dual brake pedals
- Power steering cylinder boots

### WHEELS & TIRES

- Front pneumatic tires, j-lug, side ring
- Front pneumatic wide tires j-lug w/side ring
- Front solid pneumatic tires, j-lug, side ring
- Front non-marking, solid pneumatic tires
- Front tire - special dual, side ring
- Front tire - dual, side ring
- Rear pneumatic tires, j-lug, side ring
- Rear solid pneumatic tires w/side ring
- Rear non-marking, solid pneumatic tires
- Rear side ring wheels

### SPECIAL MODEL

- Wet environment package

# 48V & 80V ELECTRIC PNEUMATIC (8FB/8FBH/8FBJ MODELS)

## TRUCK SPECIFICATIONS

### MODEL NUMBERS

GENERAL DATA				8FBH15	8FBH18	8FBH20
Load Capacity	lb (kg)			3000 (1350)	3500 (1570)	4000 (1800)
Load Center	in (mm)			24 (600)	24 (600)	24 (600)
Power Type	Battery			Battery	Battery	Battery
	Voltage	V		48	48	48
Operator Position				Rider Seated	Rider Seated	Rider Seated
Tire Type	Front / Rear			Solid Pneumatic	Solid Pneumatic	Solid Pneumatic
Wheels (x = driven)	Front / Rear			2x/2	2x/2	2x/2
EXTERIOR DIMENSIONS				8FBH15	8FBH18	8FBH20
<b>A</b> Maximum Fork Height (MFH, V mast, top of forks)	in (mm)			118 (3000)	118 (3000)	118 (3000)
<b>B</b> Free-Lift (top of forks)	in (mm)			5.7 (145)	5.7 (145)	4.9 (125)
<b>C</b> Fork Size (T x W x L)	in (mm)			1.4 x 4 x 42 (35 x 100 x 1070)	1.4 x 4 x 42 (35 x 100 x 1070)	1.4 x 4.7 x 42 (36 x 120 x 1070)
<b>D</b> Fork Spread (Outside)	Min./Max.	in (mm)		36 (920) / 8 (200)	36 (920) / 8 (200)	40.2 (1020) / 9.5 (240)
<b>E</b> Tilt Range (forward / backward)	deg			7 / 11	7 / 11	7 / 11
<b>F</b> Length to Fork Face	in (mm)			81.9 (2080)	83.3 (2115)	88.2 (2240)
<b>G</b> Overall Width	in (mm)			43.9 (1115)	43.9 (1115)	45.7 (1160)
<b>H</b> Mast Lowered Height	in (mm)			77.6 (1970)	77.6 (1970)	77.8 (1975)
<b>I</b> Mast Extended Height (top of load backrest)	in (mm)			166.1 (4220)	166.1 (4220)	166.1 (4220)
<b>J</b> Overhead Guard Height	in (mm)			82.9 (2105)	82.9 (2105)	82.9 (2105)
<b>K</b> Turning Radius (outside)	in (mm)			69.7 (1770)	70.1 (1780)	78 (1980)
<b>L</b> Load Distance	in (mm)			15.9 (405)	15.9 (405)	16.5 (420)
Basic Right-Angle Stacking Aisle Width	in (mm)			85.6 (2175)	86 (2185)	94.5 (2400)
PERFORMANCE DATA				8FBH15	8FBH18	8FBH20
Speeds	Maximum Travel (forward / rev.)	Full Load	mph (km/h)	9.0 (14.5) / 9.0 (14.5)	9.0 (14.5) / 9.0 (14.5)	9.0 (14.5) / 9.0 (14.5)
		No Load	mph (km/h)	10.6 (17) / 10.6 (17)	10.6 (17) / 10.6 (17)	10.3 (16.5) / 10.3 (16.5)
	Lifting	Full Load	fpm (mm/sec)	83 (420)	73 (370)	71 (360)
		No Load	fpm (mm/sec)	128 (650)	128 (650)	118 (600)
	Lowering	Full Load	fpm (mm/sec)	98 (500)	98 (500)	98 (500)
		No Load	fpm (mm/sec)	108 (550)	108 (550)	98 (500)
Drawbar Pull	Full Load / No Load	3-Minute Ratings	lbf (N)	2050 (930) / 1920 (870)	2050 (930) / 1920 (870)	2510 (1140) / 2380 (1080)
	Full Load / No Load	5-Minute Ratings		2050 (930) / 1920 (870)	2050 (930) / 1920 (870)	2510 (1140) / 2380 (1080)
	Full Load / No Load	60-Minute Ratings	lbf (N)	615 (280) / 615 (280)	620 (280) / 660 (300)	1060 (480) / 1100 (500)
Gradeability*	Full Load / No Load	3-Minute Ratings	lbf (N)	19/25	17/23	20/23
	Full Load / No Load	5-Minute Ratings		19/25	17/23	20/23
	Full Load / No Load	60-Minute Ratings	%	12/19	11/18	15/22
TRUCK WEIGHTS				8FBH15	8FBH18	8FBH20
Total Weight Without Battery	lb (kg)			4750 (2155)	5190 (2355)	5730 (2600)
Weight Distribution (with standard battery)	Full Load	Front	lb (kg)	8640 (3920)	9550 (4330)	11000 (4990)
		Rear	lb (kg)	1280 (580)	1370 (620)	1700 (770)
	No Load	Front	lb (kg)	3220 (1460)	3220 (1460)	3880 (1760)
		Rear	lb (kg)	3400 (1540)	3840 (1740)	4410 (2000)
TIRES				8FBH15	8FBH18	8FBH20
Tires	Number (front / rear)			2/2	2/2	2/2
	Size	Front		6.00-9-10PR	21x8-9-10PR (I)	21x8-9-14PR
Rear			5.00-8-8PR	5.00-8-10PR (I)	18x7-8-14PR	
Wheelbase	in (mm)			55.5 (1410)	55.5 (1410)	59.1 (1500)
Tread	Front	in (mm)		37.8 (960)	36 (920)	38.2 (970)
	Rear	in (mm)		35.2 (895)	35.2 (895)	37 (940)
Drawbar Pin Center Height	in (mm)			16.9 (430)	16.9 (430)	16.7 (425)
Step Height / Floor Height	in (mm)			16.9 (430) / 27.4 (695)	16.9 (430) / 27.4 (695)	17.1 (435) / 27.6 (700)
Underclearance (full load)	Minimum (mast)			2.6 (65)	2.6 (65)	2.8 (70)
	Center of Wheelbase			3.3 (85)	3.3 (85)	3.5 (90)
Brake	Service (foot)			Hydraulic	Hydraulic	Hydraulic
	Parking			Hand	Hand	Hand
POWER SYSTEM				8FBH15	8FBH18	8FBH20
Battery (6-hour ratings)	Voltage / Capacity		V/Ah	48 / 545	48 / 545	48 / 730
	Weight Minimum		lb (kg)	1860 (845)	1860 (845)	2560 (1160)
Electric Motors	Drive		hp (kW)	10.2 (7.6)	10.2 (7.6)	14.3 (10.7)
	Load Handling		hp (kW)	12.7 (9.5)	12.7 (9.5)	16.4 (12.2)
Control Type	Drive & Load Handling			Transistor Invertor	Transistor Invertor	Transistor Invertor
Auxiliary Hydraulic Function Specifications (for attachments)*	Max. Operating Pressure	psi (bar)		1700 (120)	1700 (120)	2100 (148)


\* Computed values

**MODEL NUMBERS**

GENERAL DATA				8FBH25	8FB30	8FBJ35
Load Capacity	lb (kg)			5000 (2250)	6000 (2720)	7000 (3180)
Load Center	in (mm)			24 (600)	24 (600)	24 (600)
Power Type				Battery	Battery	Battery
	Voltage	V		48	80	80
Operator Position				Rider Seated	Rider Seated	Rider Seated
Tire Type	Front / Rear			Solid Pneumatic	Solid Pneumatic	Solid Pneumatic
Wheels (x = driven)	Front / Rear			2x/2	2x/2	2x/2
EXTERIOR DIMENSIONS				8FBH25	8FB30	8FBJ35
<b>A</b> Maximum Fork Height (MFH,V mast,top of forks)	in (mm)			118 (3000)	118 (3000)	118 (3000)
<b>B</b> Free-Lift (top of forks)	in (mm)			5.1 (130)	5.3 (135)	5.5 (140)
<b>C</b> Fork Size (T x W x L)	in (mm)			1.6 x 4.7 x 42 (40 x 120 x 1070)	1.75 x 4.7 x 42 (44 x 120 x 1070)	2 x 5.5 x 42 (50 x 140 x 1070)
<b>D</b> Fork Spread (Outside)	Min./Max.	in (mm)		40.2 (1020) / 9.5 (240)	42 (1070) / 9.5 (240)	42 (1070) / 9.5 (240)
<b>E</b> Tilt Range (forward / backward)	deg			7/11	6/11	6/11
<b>F</b> Length to Fork Face	in (mm)			90.2 (2290)	98 (2490)	101.4 (2575)
<b>G</b> Overall Width	in (mm)			45.7 (1160)	48.8 (1240)	48.8 (1240)
<b>H</b> Mast Lowered Height	in (mm)			77.8 (1975)	79.5 (2020)	83.1 (2110)
<b>I</b> Mast Extended Height (top of load backrest)	in (mm)			166.1 (4220)	166.1 (4220)	166.1 (4220)
<b>J</b> Overhead Guard Height	in (mm)			82.9 (2105)	86.4 (2195)	86.4 (2195)
<b>K</b> Turning Radius (outside)	in (mm)			78.7 (2000)	87 (2210)	89.4 (2270)
<b>L</b> Load Distance	in (mm)			17.1 (435)	19.1 (485)	19.7 (500)
Basic Right-Angle Stacking Aisle Width	in (mm)			85.6 (2175)	86 (2185)	94.5 (2400)
PERFORMANCE DATA				8FBH25	8FB30	8FBJ35
Speeds	Maximum Travel (forward / rev.)	Full Load	mph (km/h)	2470 (1120) / 2580 (1170)	2930 (1330) / 2820 (1280)	2890 (1310) / 2820 (1280)
		No Load	mph (km/h)	2470 (1120) / 2580 (1170)	2930 (1330) / 2820 (1280)	2890 (1310) / 2820 (1280)
	Lifting	Full Load	fpm (mm/sec)	1010 (460) / 1080 (490)	1190 (540) / 1260 (570)	1150 (520) / 1230 (560)
		No Load	fpm (mm/sec)	17/21	17/22	14/20
	Lowering	Full Load	fpm (mm/sec)	17/21	17/22	14/20
		No Load	fpm (mm/sec)	12/20	11/19	9/17
Drawbar Pull	Full Load / No Load	3-Minute Ratings	lbf (N)	2050 (930) / 1920 (870)	2050 (930) / 1920 (870)	2510 (1140) / 2380 (1080)
	Full Load / No Load	5-Minute Ratings		2050 (930) / 1920 (870)	2050 (930) / 1920 (870)	2510 (1140) / 2380 (1080)
	Full Load / No Load	60-Minute Ratings	lbf (N)	615 (280) / 615 (280)	620 (280) / 660 (300)	1060 (480) / 1100 (500)
Gradeability*	Full Load / No Load	3-Minute Ratings	lbf (N)	19/25	17/23	20/23
	Full Load / No Load	5-Minute Ratings		19/25	17/23	20/23
	Full Load / No Load	60-Minute Ratings	%	12/19	11/18	15/22
TRUCK WEIGHTS				8FBH25	8FB30	8FBJ35
Total Weight Without Battery	lb (kg)			6550 (2970)	8135 (3690)	9460 (4290)
Weight Distribution (with standard battery)	Full Load	Front	lb (kg)	12810 (5810)	15170 (6880)	17280 (7840)
		Rear	lb (kg)	1810 (820)	1830 (830)	2140 (970)
	No Load	Front	lb (kg)	3860 (1750)	4610 (2090)	4890 (2220)
		Rear	lb (kg)	5250 (2380)	5780 (2620)	6810 (3090)
TIRES				8FBH25	8FB30	8FBJ35
Tires	Number (front / rear)			2/2	2/2	2/2
	Size	Front		21x8-9-14PR	28x9-15-14PR	28x9-15-14PR
Rear			18x7-8-14PR	6.50-10-10PR	6.50-10-14PR	
Wheelbase	in (mm)			59.1 (1500)	65 (1650)	71 (1805)
Tread	Front	in (mm)		38.2 (970)	39.8 (1010)	39.8 (1010)
	Rear	in (mm)		37 (940)	38 (965)	38 (965)
Drawbar Pin Center Height	in (mm)			11 (280)	13.4 (340)	13.4 (340)
Step Height / Floor Height	in (mm)			17.1 (435) / 27.6 (700)	20.3/31 (515/785)	20.3/31 (515/785)
Underclearance (full load)	Minimum (mast)		in (mm)	2.6 (65)	4.5 (115)	4.5 (115)
	Center of Wheelbase		in (mm)	3.3 (85)	5.5 (140)	5.5 (140)
Brake	Service (foot)			Hydraulic	Hydraulic	Hydraulic
	Parking			Hand	Hand	Hand
POWER SYSTEM				8FBH25	8FB30	8FBJ35
Battery (6-hour ratings)	Voltage / Capacity		V/Ah	48 / 730	80 / 370	80/ 565
	Weight Minimum		lb (kg)	2560 (1160)	2250 (1020)	3230 (1465)
Electric Motors	Drive		hp (kW)	14.3 (10.7)	16 (11.9)	16 (11.9)
	Load Handling		hp (kW)	16.4 (12.2)	19.3 (14.4)	19.3 (14.4)
Control Type	Drive & Load Handling			Transistor Invertor	Transistor Invertor	Transistor Invertor
Auxiliary Hydraulic Function Specifications (for attachments)*	Max. Operating Pressure	psi (bar)		2100 (148)	2300 (162)	2300 (162)

\* Computed values

## EXTERIOR DIMENSIONS

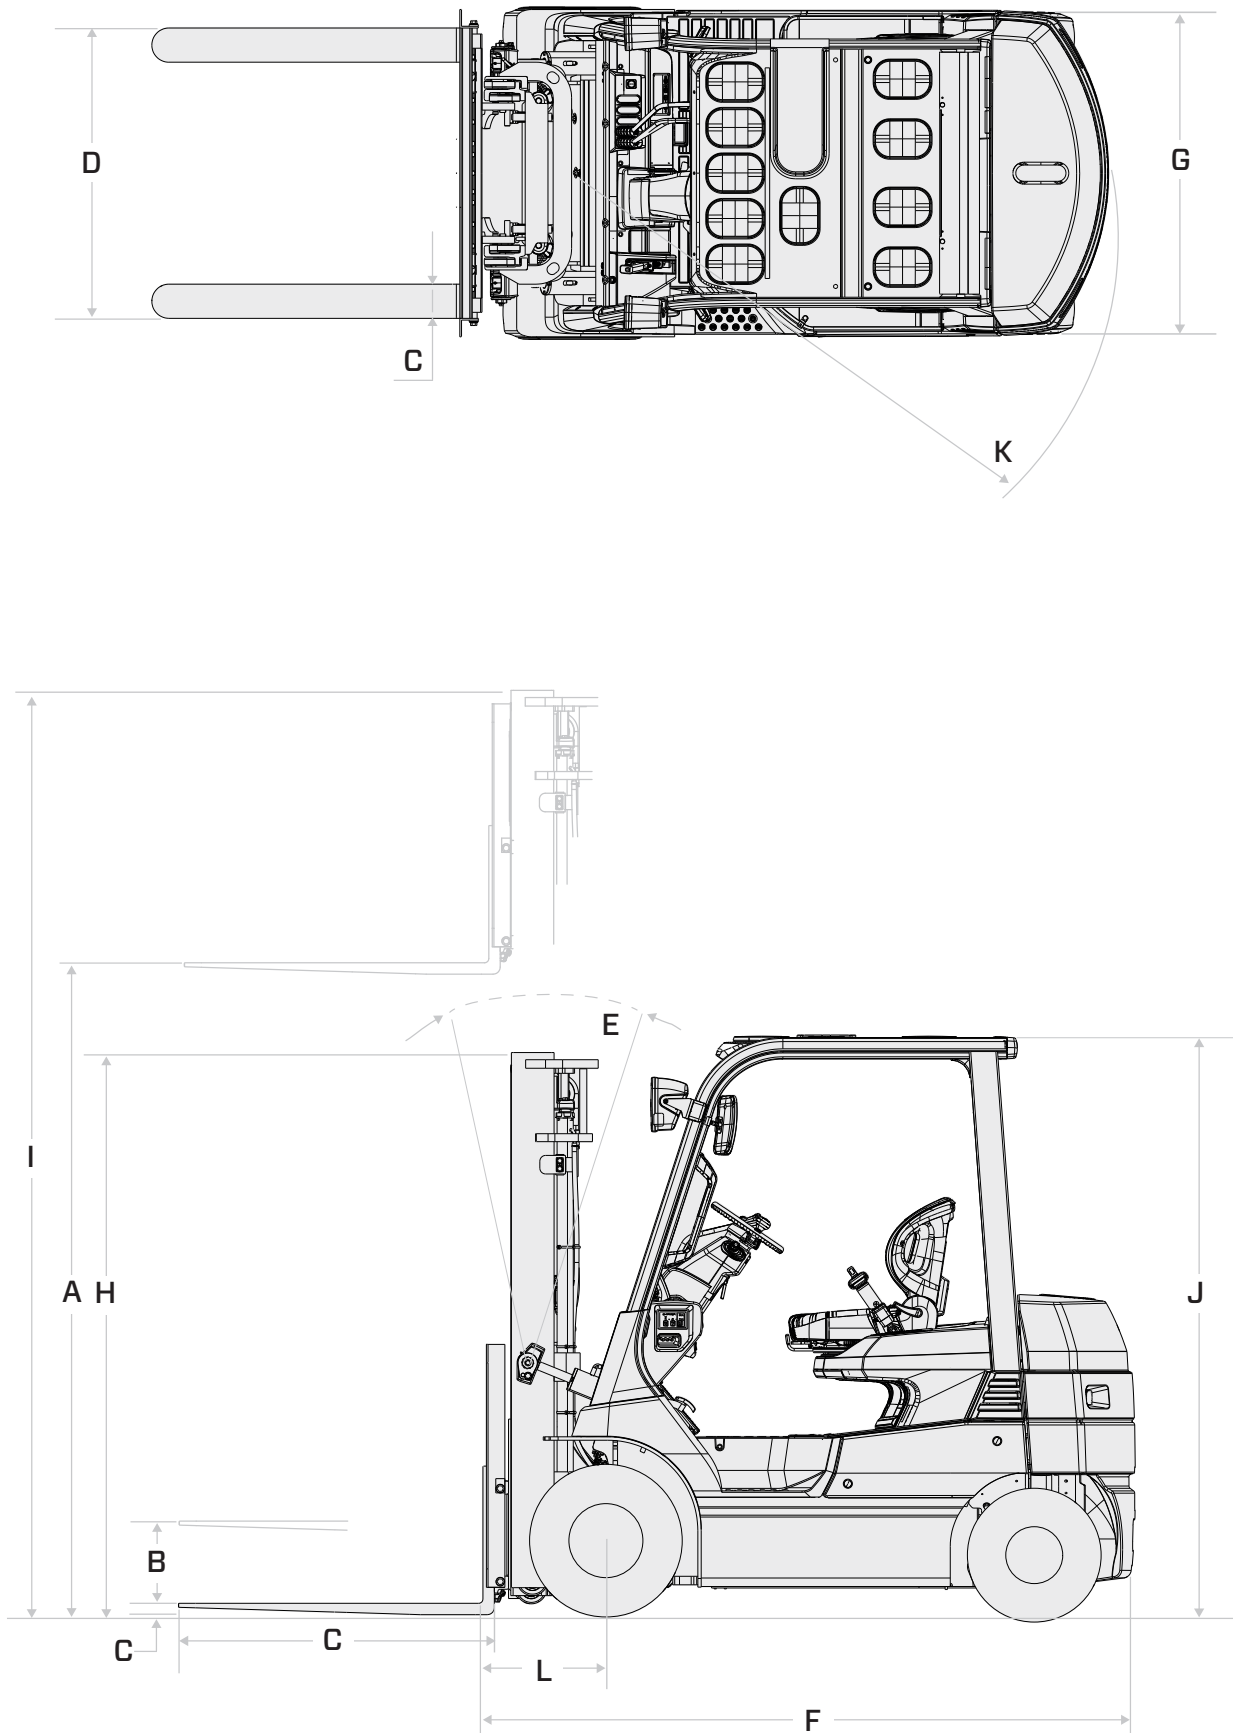



## MAST SPECIFICATIONS

MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT				FREE-LIFT		SINGLE TIRE			DUAL TIRE		
		LOWERED	EXTENDED		WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST <sup>1</sup>	TILT RANGE		LOAD CAPACITY AT 24 IN. (600 MM) LOAD CENTER <sup>2</sup>	TILT RANGE		LOAD CAPACITY AT 24 IN. (600 MM) LOAD CENTER <sup>2</sup>	
			WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST <sup>1</sup>			FWD	BWD		FWD	BWD		
		in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	deg	deg	lb (kg)	deg	deg	lb (kg)
<b>8FBH15</b>													
Wide Visible (V)	99.5 (2535)	67.7 (1720)	122.2 (3105)	146.5 (3720)	5.7 (145)	5.7 (145)	7	11	3000 (1350)	7	11	—*	
	107.5 (2735)	71.7 (1820)	130.1 (3305)	154.3 (3920)	5.7 (145)	5.7 (145)	7	11	3000 (1350)	7	11	—*	
	119 (3035)	77.6 (1970)	141.9 (3605)	166.1 (4220)	5.7 (145)	5.7 (145)	7	11	3000 (1350)	7	11	—*	
	131 (3335)	83.5 (2120)	153.7 (3905)	178 (4520)	5.7 (145)	5.7 (145)	7	11	3000 (1350)	7	11	—*	
	139 (3535)	87.4 (2220)	161.6 (4105)	185.8 (4720)	5.7 (145)	5.7 (145)	7	11	3000 (1350)	7	11	—*	
	147 (3735)	93.7 (2380)	169.5 (4305)	193.7 (4920)	5.7 (145)	5.7 (145)	7	11	3000 (1350)	7	11	—*	
	158.5 (4035)	101.2 (2570)	181.3 (4605)	205.5 (5220)	5.7 (145)	5.7 (145)	7	11	3000 (1350)	7	11	—*	
	178.5 (4535)	111 (2820)	201 (5105)	225.2 (5720)	5.7 (145)	5.7 (145)	7	5	2870 (1300)	7	5	—*	
Full Free-Lift 2-Stage (FV)	198 (5035)	120.9 (3070)	220.7 (5605)	244.9 (6220)	5.7 (145)	5.7 (145)	7	5	2670 (1210)	7	5	3090 (1400)	
	119 (3035)	77.6 (1970)	140.4 (3565)	166.1 (4220)	55.3 (1405) <sup>2</sup>	29.5 (750)	7	11	3000 (1350)	7	11	—*	
	131 (3335)	83.5 (2120)	152.2 (3865)	178 (4520)	61.2 (1555) <sup>2</sup>	35.4 (900)	7	11	3000 (1350)	7	11	—*	
	139 (3535)	87.4 (2220)	160 (4065)	185.8 (4720)	65.2 (1655) <sup>2</sup>	39.4 (1000)	7	11	3000 (1350)	7	11	—*	
	147 (3735)	93.7 (2380)	167.9 (4265)	193.7 (4920)	71.5 (1815) <sup>2</sup>	45.7 (1160)	7	11	3000 (1350)	7	11	—*	
	158.5 (4035)	101.2 (2570)	179.7 (4565)	205.5 (5220)	78.9 (2005) <sup>2</sup>	53.1 (1350)	7	11	3000 (1350)	7	11	—*	
Full Free-Lift 3-Stage (FSV)	147 (3735)	69.7 (1770)	166.9 (4240)	193.7 (4920)	48.6 (1235) <sup>2</sup>	21.7 (550) <sup>2</sup>	7	5	2780 (1260)	7	5	—*	
	158.5 (4035)	73.6 (1870)	178.7 (4540)	205.5 (5220)	52.6 (1335) <sup>2</sup>	25.6 (650) <sup>2</sup>	7	5	2780 (1260)	7	5	—*	
	170.5 (4335)	77.6 (1970)	190.6 (4840)	217.3 (5520)	56.5 (1435) <sup>2</sup>	29.5 (750) <sup>2</sup>	7	5	2780 (1260)	7	5	—*	
	178.5 (4535)	80.3 (2040)	198.4 (5040)	225.2 (5720)	59.3 (1505) <sup>2</sup>	32.3 (820) <sup>2</sup>	7	5	2670 (1220)	7	5	—*	
	186 (4735)	83.5 (2120)	206.3 (5240)	233.1 (5920)	62.4 (1585) <sup>2</sup>	35.4 (900) <sup>2</sup>	7	5	2670 (1220)	7	5	—*	
	198 (5035)	87.4 (2220)	218.1 (5540)	244.9 (6220)	66.3 (1685) <sup>2</sup>	39.4 (1000) <sup>2</sup>	7	5	2380 (1080)	7	5	2580 (1170)	
	217.5 (5535)	93.7 (2380)	237.8 (6040)	264.6 (6720)	72.6 (1845) <sup>2</sup>	45.7 (1160) <sup>2</sup>	7	5	2180 (990)	7	5	2470 (1120)	
	237.5 (6035)	101.2 (2570)	257.5 (6540)	284.3 (7220)	80.1 (2035) <sup>2</sup>	53.1 (1350) <sup>2</sup>	7	5	1790 (810)	7	5	2180 (990)	

MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT				FREE-LIFT		SINGLE TIRE			DUAL TIRE		
		LOWERED	EXTENDED		WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST <sup>1</sup>	TILT RANGE		LOAD CAPACITY AT 24 IN. (600 MM) LOAD CENTER <sup>2</sup>	TILT RANGE		LOAD CAPACITY AT 24 IN. (600 MM) LOAD CENTER <sup>2</sup>	
			WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST <sup>1</sup>			FWD	BWD		FWD	BWD		
		in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	deg	deg	lb (kg)	deg	deg	lb (kg)
<b>8FBH18</b>													
Wide Visible (V)	99.5 (2535)	67.7 (1720)	122.2 (3105)	146.5 (3720)	5.7 (145)	5.7 (145)	7	11	3500 (1570)	7	11	—*	
	107.5 (2735)	71.7 (1820)	130.1 (3305)	154.3 (3920)	5.7 (145)	5.7 (145)	7	11	3500 (1570)	7	11	—*	
	119 (3035)	77.6 (1970)	141.9 (3605)	166.1 (4220)	5.7 (145)	5.7 (145)	7	11	3500 (1570)	7	11	—*	
	131 (3335)	83.5 (2120)	153.7 (3905)	178 (4520)	5.7 (145)	5.7 (145)	7	11	3500 (1570)	7	11	—*	
	139 (3535)	87.4 (2220)	161.6 (4105)	185.8 (4720)	5.7 (145)	5.7 (145)	7	11	3500 (1570)	7	11	—*	
	147 (3735)	93.7 (2380)	169.5 (4305)	193.7 (4920)	5.7 (145)	5.7 (145)	7	11	3500 (1570)	7	11	—*	
	158.5 (4035)	101.2 (2570)	181.3 (4605)	205.5 (5220)	5.7 (145)	5.7 (145)	7	5	3500 (1570)	7	11	—*	
	178.5 (4535)	111 (2820)	201 (5105)	225.2 (5720)	5.7 (145)	5.7 (145)	7	5	3060 (1390)	7	5	3260 (1480)	
Full Free-Lift 2-Stage (FV)	198 (5035)	120.9 (3070)	220.7 (5605)	244.9 (6220)	5.7 (145)	5.7 (145)	7	5	2380 (1080)	7	5	3060 (1390)	
	119 (3035)	77.6 (1970)	140.4 (3565)	166.1 (4220)	55.3 (1405) <sup>2</sup>	29.5 (750) <sup>2</sup>	7	11	3500 (1570)	7	11	3500 (1570)	
	131 (3335)	83.5 (2120)	152.2 (3865)	178 (4520)	61.2 (1555) <sup>2</sup>	35.4 (900) <sup>2</sup>	7	11	3500 (1570)	7	11	3500 (1570)	
	139 (3535)	87.4 (2220)	160 (4065)	185.8 (4720)	65.2 (1655) <sup>2</sup>	39.4 (1000) <sup>2</sup>	7	11	3500 (1570)	7	11	3500 (1570)	
	147 (3735)	93.7 (2380)	167.9 (4265)	193.7 (4920)	71.5 (1815) <sup>2</sup>	45.7 (1160) <sup>2</sup>	7	11	3500 (1570)	7	11	3500 (1570)	
	158.5 (4035)	101.2 (2570)	179.7 (4565)	205.5 (5220)	78.9 (2005) <sup>2</sup>	53.1 (1350) <sup>2</sup>	7	5	3500 (1570)	7	11	3500 (1570)	
Full Free-Lift 3-Stage (FSV)	147 (3735)	69.7 (1770)	166.9 (4240)	193.7 (4920)	48.6 (1235) <sup>2</sup>	21.7 (550) <sup>2</sup>	7	5	3175 (1440)	7	5	—*	
	158.5 (4035)	73.6 (1870)	178.7 (4540)	205.5 (5220)	52.6 (1335) <sup>2</sup>	25.6 (650) <sup>2</sup>	7	5	3175 (1440)	7	5	—*	
	170.5 (4335)	77.6 (1970)	190.6 (4840)	217.3 (5520)	56.5 (1435) <sup>2</sup>	29.5 (750) <sup>2</sup>	7	5	3060 (1390)	7	5	—*	
	178.5 (4535)	80.3 (2040)	198.4 (5040)	225.2 (5720)	59.3 (1505) <sup>2</sup>	32.3 (820) <sup>2</sup>	7	5	2980 (1350)	7	5	—*	
	186 (4735)	83.5 (2120)	206.3 (5240)	233.1 (5920)	62.4 (1585) <sup>2</sup>	35.4 (900) <sup>2</sup>	7	5	2980 (1350)	7	5	—*	
	198 (5035)	87.4 (2220)	218.1 (5540)	244.9 (6220)	66.3 (1685) <sup>2</sup>	39.4 (1000) <sup>2</sup>	7	5	2470 (1120)	7	5	2865 (1300)	
	217.5 (5535)	93.7 (2380)	237.8 (6040)	264.6 (6720)	72.6 (1845) <sup>2</sup>	45.7 (1160) <sup>2</sup>	7	5	1785 (810)	7	5	2780 (1260)	
	237.5 (6035)	101.2 (2570)	257.5 (6540)	284.3 (7220)	80.1 (2035) <sup>2</sup>	53.1 (1350) <sup>2</sup>	7	5	1480 (670) [1]	7	5	2270 (1030)	

\* Capacity available by special request  
 1 Height of standard load backrest is 48" (1220 mm)  
 2 All capacities of 1,500 lbs or less are subject to a secondary review and could be denied by Toyota



MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT				FREE-LIFT		SINGLE TIRE			DUAL TIRE		
		LOWERED	EXTENDED		WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST <sup>1</sup>	TILT RANGE		LOAD CAPACITY AT 24 IN. (600 MM) LOAD CENTER <sup>2</sup>	TILT RANGE		LOAD CAPACITY AT 24 IN. (600 MM) LOAD CENTER <sup>2</sup>	
			WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST <sup>1</sup>			FWD	BWD		FWD	BWD		
		in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	deg	deg	lb (kg)	deg	deg	lb (kg)
<b>8FBH20</b>													
Wide Visible (V)	99.5 (2538)	67.9 (1725)	124.8 (3170)	148 (3720)	4.9 (125)	4.9 (125)	7	11	4000 (1800)	7	11	—*	
	107.5 (2738)	71.9 (1825)	132.7 (3370)	155.8 (3920)	4.9 (125)	4.9 (125)	7	11	4000 (1800)	7	11	—*	
	119.5 (3038)	77.8 (1975)	144.5 (3670)	167.6 (4220)	4.9 (125)	4.9 (125)	7	11	4000 (1800)	7	11	—*	
	131 (3338)	83.7 (2125)	156.3 (3970)	179.4 (4520)	4.9 (125)	4.9 (125)	7	11	4000 (1800)	7	11	—*	
	139 (3538)	87.6 (2225)	164.2 (4170)	187.3 (4720)	4.9 (125)	4.9 (125)	7	11	4000 (1800)	7	11	—*	
	147 (3738)	93.9 (2385)	168.1 (4370)	195.2 (4920)	4.9 (125)	4.9 (125)	7	11	4000 (1800)	7	11	—*	
	158.5 (4038)	101.4 (2575)	183.9 (4670)	207 (5220)	4.9 (125)	4.9 (125)	7	11	4000 (1800)	7	11	—*	
	178.5 (4538)	111.2 (2825)	203.5 (5170)	226.7 (5720)	4.9 (125)	4.9 (125)	7	5	3770 (1710)	7	5	—*	
198 (5038)	121.1 (3075)	223.2 (5670)	246.4 (6220)	4.9 (125)	4.9 (125)	7	5	3300 (1480)	7	5	3570 (1620)		
Full Free-Lift 2-Stage (FV)	119.5 (3038)	77.8 (1975)	141.9 (3605)	167.6 (4220)	53.9 (1370)	29.7 (755)	7	5	4000 (1800)	7	5	—*	
	131 (3338)	83.7 (2125)	153.7 (3905)	179.4 (4520)	59.8 (1520)	35.6 (905)	7	5	4000 (1800)	7	5	—*	
	139 (3538)	87.6 (2225)	161.6 (4105)	187.3 (4720)	63.8 (1620)	39.6 (1005)	7	5	4000 (1800)	7	5	—*	
	147 (3738)	93.9 (2385)	169.5 (4305)	195.2 (4920)	70.1 (1780)	45.9 (1165)	7	5	4000 (1800)	7	5	—*	
	158.5 (4038)	101.4 (2575)	181.3 (4605)	207 (5220)	77.6 (1970)	52.6 (1355)	7	5	4000 (1800)	7	5	—*	
Full Free-Lift 3-Stage (FSV)	147 (3738)	69.9 (1775)	171.1 (4345)	195.2 (4920)	44.9 (1130)	21.9 (555)	7	5	3770 (1710)	7	5	—*	
	158.5 (4038)	73.8 (1875)	182.9 (4645)	207 (5220)	48.4 (1230)	25.8 (655)	7	5	3770 (1710)	7	5	—*	
	170.5 (4338)	77.8 (1975)	194.7 (4945)	218.8 (5520)	52.4 (1330)	29.7 (755)	7	5	3680 (1670)	7	5	—*	
	178.5 (4538)	80.5 (2045)	202.6 (5145)	226.7 (5720)	55.1 (1400)	32.5 (825)	7	5	3570 (1620)	7	5	—*	
	186.5 (4738)	83.7 (2125)	210.4 (5345)	234.6 (5920)	58.3 (1480)	35.6 (905)	7	5	3570 (1620)	7	5	—*	
	198 (5038)	87.6 (2225)	222.2 (5645)	246.4 (6220)	62.2 (1580)	39.6 (1005)	7	5	3090 (1400)	7	5	3480 (1580)	
	218 (5538)	93.9 (2385)	241.9 (6145)	266.1 (6720)	68.5 (1740)	45.9 (1165)	7	5	2380 (1080)	7	5	3370 (1530)	
	237.5 (6038)	101.4 (2575)	261.6 (6645)	285.7 (7220)	76 (1930)	53.3 (1355)	7	5	1785 (810)	7	5	2980 (1350)	

MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT				FREE-LIFT		SINGLE TIRE			DUAL TIRE		
		LOWERED	EXTENDED		WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST <sup>1</sup>	TILT RANGE		LOAD CAPACITY AT 24 IN. (600 MM) LOAD CENTER <sup>2</sup>	TILT RANGE		LOAD CAPACITY AT 24 IN. (600 MM) LOAD CENTER <sup>2</sup>	
			WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST <sup>1</sup>			FWD	BWD		FWD	BWD		
		in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	deg	deg	lb (kg)	deg	deg	lb (kg)
<b>8FBH25</b>													
Wide Visible (V)	100 (2542)	67.9 (1725)	124.6 (3165)	148 (3720)	5.1 (130)	5.1 (130)	7	11	5000 (2250)	7	11	—*	
	107.5 (2742)	71.9 (1825)	132.5 (3365)	155.8 (3920)	5.1 (130)	5.1 (130)	7	11	5000 (2250)	7	11	—*	
	119.5 (3042)	77.8 (1975)	144.3 (3665)	167.6 (4220)	5.1 (130)	5.1 (130)	7	11	5000 (2250)	7	11	—*	
	131.5 (3342)	83.7 (2125)	156.1 (3965)	179.4 (4520)	5.1 (130)	5.1 (130)	7	11	5000 (2250)	7	11	—*	
	139 (3542)	87.6 (2225)	164 (4165)	187.3 (4720)	5.1 (130)	5.1 (130)	7	11	5000 (2250)	7	11	—*	
	147 (3742)	93.9 (2385)	171.9 (4365)	195.2 (4920)	5.1 (130)	5.1 (130)	7	11	5000 (2250)	7	11	—*	
	159 (4042)	101.4 (2575)	183.7 (4665)	207 (5220)	5.1 (130)	5.1 (130)	7	5	5000 (2250)	7	11	—*	
	178.5 (4542)	111.2 (2825)	203.3 (5165)	226.7 (5720)	5.1 (130)	5.1 (130)	7	5	4560 (2070)	7	5	4870 (2210)	
198.5 (5042)	121.1 (3075)	223 (5665)	246.4 (6220)	5.1 (130)	5.1 (130)	7	5	3570 (1620)	7	5	4670 (2120)		
Full Free-Lift 2-Stage (FV)	119.5 (3042)	77.8 (1975)	141.7 (3600)	167.6 (4220)	54.1 (1375) <sup>2</sup>	29.7 (755) <sup>2</sup>	7	11	5000 (2250)	7	11	—*	
	131.5 (3342)	83.7 (2125)	153.5 (3900)	179.4 (4520)	60 (1525) <sup>2</sup>	35.6 (905) <sup>2</sup>	7	11	5000 (2250)	7	11	—*	
	139 (3542)	87.6 (2225)	161.4 (4100)	187.3 (4720)	64 (1625) <sup>2</sup>	39.6 (1005) <sup>2</sup>	7	11	5000 (2250)	7	11	—*	
	147 (3742)	93.9 (2385)	169.3 (4300)	195.2 (4920)	70.3 (1785) <sup>2</sup>	45.9 (1165) <sup>2</sup>	7	11	5000 (2250)	7	11	—*	
	159 (4042)	101.4 (2575)	181.1 (4600)	207 (5220)	77.8 (1975) <sup>2</sup>	52.6 (1355) <sup>2</sup>	7	5	5000 (2250)	7	11	—*	
Full Free-Lift 3-Stage (FSV)	147 (3742)	69.9 (1775)	170.9 (4340)	195.2 (4920)	44.7 (1135) <sup>2</sup>	21.9 (555) <sup>2</sup>	7	5	4780 (2170)	7	5	—*	
	159 (4042)	73.8 (1875)	182.7 (4640)	207 (5220)	48.6 (1235) <sup>2</sup>	25.8 (655) <sup>2</sup>	7	5	4780 (2170)	7	5	—*	
	170.5 (4342)	77.8 (1975)	194.5 (4940)	218.8 (5520)	52.6 (1335) <sup>2</sup>	29.7 (755) <sup>2</sup>	7	5	4590 (2080)	7	5	4780 (2170)	
	178.5 (4542)	80.5 (2045)	202.4 (5140)	226.7 (5720)	55.3 (1405) <sup>2</sup>	32.5 (825) <sup>2</sup>	7	5	4080 (1850)	7	5	4590 (2080)	
	186.5 (4742)	83.7 (2125)	210.2 (5340)	234.6 (5920)	58.5 (1485) <sup>2</sup>	35.6 (905) <sup>2</sup>	7	5	4080 (1850)	7	5	4590 (2080)	
	198.5 (5042)	87.6 (2225)	222 (5640)	246.4 (6220)	62.4 (1585) <sup>2</sup>	39.6 (1005) <sup>2</sup>	7	5	3280 (1490)	7	5	4390 (1990)	
	218 (5542)	93.9 (2385)	241.7 (6140)	266.1 (6720)	68.7 (1745) <sup>2</sup>	45.9 (1165) <sup>2</sup>	7	5	2490 (1130)	7	5	3990 (1810)	
	237.5 (6042)	101.4 (2575)	261.4 (6640)	285.7 (7220)	76.2 (1935) <sup>2</sup>	53.3 (1355) <sup>2</sup>	7	5	1900 (900)	7	5	3090 (1400)	

\* Capacity available by special request  
1 Height of standard load backrest is 48" (1220 mm)  
2 All capacities of 1,500 lbs or less are subject to a secondary review and could be denied by Toyota

## MAST SPECIFICATIONS

MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT				FREE-LIFT		SINGLE TIRE			DUAL TIRE		
		LOWERED	EXTENDED		WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST <sup>1</sup>	TILT RANGE		LOAD CAPACITY AT 24 IN. (600 MM) LOAD CENTER <sup>2</sup>	TILT RANGE		LOAD CAPACITY AT 24 IN. (600 MM) LOAD CENTER <sup>2</sup>	
			WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST <sup>1</sup>			FWD	BWD		FWD	BWD		
		in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	deg	deg	lb (kg)	deg	deg	lb (kg)
<b>8FB30</b>													
Wide Visible (V)	100 (2545)	69.7 (1770)	126.8 (3220)	146.5 (3720)	5.3 (135)	5.3 (135)	6	11	6000 (2720)	6	11	—*	
	108 (2745)	73.6 (1870)	134.6 (3420)	154.3 (3920)	5.3 (135)	5.3 (135)	6	11	6000 (2720)	6	11	—*	
	119.5 (3045)	79.5 (2020)	146.5 (3720)	166.1 (4220)	5.3 (135)	5.3 (135)	6	11	6000 (2720)	6	11	—*	
	131.5 (3345)	85.4 (2170)	158.3 (4020)	178 (4520)	5.3 (135)	5.3 (135)	6	11	6000 (2720)	6	11	—*	
	139.5 (3545)	89.4 (2270)	166.1 (4220)	185.8 (4720)	5.3 (135)	5.3 (135)	6	11	6000 (2720)	6	11	—*	
	147 (3745)	95.7 (2430)	174 (4420)	193.7 (4920)	5.3 (135)	5.3 (135)	6	11	6000 (2720)	6	11	—*	
	159 (4045)	103.1 (2620)	185.8 (4720)	205.5 (5220)	5.3 (135)	5.3 (135)	6	11	6000 (2720)	6	11	—*	
	178.5 (4545)	113 (2870)	205.5 (5220)	225.2 (5720)	5.3 (135)	5.3 (135)	6	5	5700 (2580)	6	5	6000 (2720)	
198.5 (5045)	122.8 (3120)	255.2 (5720)	244.9 (6220)	5.3 (135)	5.3 (135)	6	5	4700 (2130)	6	5	6000 (2720)		
Full Free-Lift 2-Stage (FV)	119.5 (3045)	79.5 (2020)	142.3 (3615)	166.1 (4220)	55.3 (1405)	31.5 (800)	6	11	6000 (2720)	6	11	—*	
	131.5 (3345)	85.4 (2170)	154.1 (3915)	178 (4520)	61.2 (1555)	37.4 (950)	6	11	6000 (2720)	6	11	—*	
	139.5 (3545)	89.4 (2270)	162 (4115)	185.8 (4720)	65.2 (1655)	41.3 (1050)	6	11	6000 (2720)	6	11	—*	
	147 (3745)	95.7 (2430)	169.9 (4315)	193.7 (4920)	71.5 (1815)	47.6 (1210)	6	11	6000 (2720)	6	11	—*	
	159 (4045)	103.1 (2620)	181.7 (4615)	205.5 (5220)	78.9 (2005)	55.1 (1400)	6	11	6000 (2720)	6	11	—*	
Full Free-Lift 3-Stage (FSV)	147 (3745)	75.6 (1920)	169.9 (4315)	193.7 (4920)	51.4 (1305)	27.6 (700)	6	5	6000 (2720)	6	5	—*	
	159 (4045)	79.5 (2020)	181.7 (4615)	205.5 (5220)	55.3 (1405)	31.5 (800)	6	5	6000 (2720)	6	5	—*	
	171 (4345)	85.4 (2170)	193.5 (4915)	217.3 (5520)	61.2 (1555)	37.4 (950)	6	5	6000 (2720)	6	5	—*	
	179 (4545)	87.4 (2220)	201.4 (5115)	225.2 (5720)	63.2 (1605)	39.4 (1000)	6	5	5600 (2540)	6	5	6000 (2720)	
	187 (4750)	89.4 (2270)	209.3 (5315)	233.1 (5920)	65.2 (1655)	41.3 (1050)	6	5	5600 (2540)	6	5	6000 (2720)	
	198.5 (5045)	95.7 (2430)	221.1 (5615)	244.9 (6220)	71.5 (1815)	47.6 (1210)	6	5	4800 (2180)	6	5	5800 (2630)	
	218 (5545)	103.1 (2620)	240.7 (6115)	264.6 (6720)	78.9 (2005)	55.1 (1400)	6	5	3790 (1720)	6	5	5290 (2400)	
	237.5 (6045)	113 (2870)	260.4 (6615)	284.3 (7220)	88.8 (2255)	65 (1650)	6	5	2890 (1310)	6	5	4100 (1860)	

MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT				FREE-LIFT		SINGLE TIRE			DUAL TIRE		
		LOWERED	EXTENDED		WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST <sup>1</sup>	TILT RANGE		LOAD CAPACITY AT 24 IN. (600 MM) LOAD CENTER <sup>2</sup>	TILT RANGE		LOAD CAPACITY AT 24 IN. (600 MM) LOAD CENTER <sup>2</sup>	
			WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST <sup>1</sup>			FWD	BWD		FWD	BWD		
		in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	deg	deg	lb (kg)	deg	deg	lb (kg)
<b>8FBJ35</b>													
Wide Visible (V)	100 (2545)	74.4 (1890)	132.3 (3360)	146.5 (3720)	5.5 (140)	5.5 (140)	6	11	7000 (3180)	6	11	—*	
	108 (2745)	78.3 (1990)	140.2 (3560)	154.3 (3920)	5.5 (140)	5.5 (140)	6	11	7000 (3180)	6	11	—*	
	119.5 (3045)	83.1 (2110)	152 (3860)	166.1 (4220)	5.5 (140)	5.5 (140)	6	11	7000 (3180)	6	11	—*	
	131.5 (3345)	90.2 (2290)	163.8 (4160)	178 (4520)	5.5 (140)	5.5 (140)	6	11	7000 (3180)	6	11	—*	
	139.5 (3545)	94.1 (2390)	171.7 (4360)	185.8 (4720)	5.5 (140)	5.5 (140)	6	11	7000 (3180)	6	11	—*	
	147 (3745)	98 (2490)	179.5 (4560)	193.7 (4920)	5.5 (140)	5.5 (140)	6	11	7000 (3180)	6	11	—*	
	159 (4045)	107.9 (2740)	191.3 (4860)	205.5 (5220)	5.5 (140)	5.5 (140)	6	11	7000 (3180)	6	11	—*	
	178.5 (4545)	117.7 (2990)	211 (5360)	255.2 (5720)	5.5 (140)	5.5 (140)	6	5	6700 (3040)	6	5	7000 (3180)	
198.5 (5045)	127.6 (3240)	230.7 (5860)	244.9 (6220)	5.5 (140)	5.5 (140)	6	5	5490 (2490)	6	5	6810 (3090)		
Full Free-Lift 2-Stage (FV)	119.5 (3045)	83.1 (2110)	146.7 (3725)	166.1 (4220)	53.7 (1385)	35 (890)	6	11	7000 (3180)	6	11	7000 (3175)	
	131.5 (3345)	90.2 (2290)	158.5 (4025)	178 (4520)	61.6 (1565)	42.1 (1070)	6	11	7000 (3180)	6	11	7000 (3175)	
	139.5 (3545)	94.1 (2390)	166.3 (4225)	185.8 (4720)	65.6 (1665)	46.1 (1170)	6	11	7000 (3180)	6	11	7000 (3175)	
	147 (3745)	98 (2490)	174.2 (4425)	193.7 (4920)	69.5 (1765)	50 (1270)	6	11	7000 (3180)	6	11	7000 (3175)	
	159 (4045)	107.9 (2740)	186 (4725)	205.5 (5220)	79.3 (2015)	59.8 (1520)	6	11	7000 (3180)	6	11	7000 (3175)	
Full Free-Lift 3-Stage (FSV)	147 (3745)	79.5 (2020)	174.2 (4425)	193.7 (4920)	51 (1295)	31.5 (800)	6	5	7000 (3180)	6	5	—*	
	159 (4045)	85.4 (2170)	186 (4725)	205.5 (5220)	56.9 (1445)	37.4 (950)	6	5	7000 (3180)	6	5	—*	
	171 (4345)	87.6 (2225)	197.8 (5025)	217.3 (5520)	58.9 (1495)	39.6 (1005)	6	5	7000 (3180)	6	5	—*	
	179 (4545)	89.4 (2270)	205.7 (5225)	225.2 (5720)	60.8 (1545)	41.3 (1050)	6	5	5800 (2630)	6	5	6810 (3090)	
	187 (4750)	95.7 (2430)	213.6 (5425)	233.1 (5920)	67.1 (1705)	47.6 (1210)	6	5	5800 (2630)	6	5	6810 (3090)	
	198.5 (5045)	103 (2620)	255.4 (5725)	244.9 (6220)	74.6 (1895)	55.1 (1400)	6	5	5000 (2270)	6	5	6610 (3000)	
	218 (5545)	113 (2870)	245.1 (6225)	264.6 (6720)	84.4 (2145)	65 (1650)	6	5	3900 (1770)	6	5	5800 (2630)	
	237.5 (6045)	122.8 (3120)	264.8 (6725)	284.3 (7220)	94.3 (2395)	74.8 (1900)	6	5	3000 (1360)	6	5	4410 (2000)	

\* Capacity available by special request  
<sup>1</sup> Height of standard load backrest is 48" (1220 mm)  
<sup>2</sup> All capacities of 1,500 lbs or less are subject to a secondary review and could be denied by Toyota





# “I’M HERE TO MAKE SURE YOUR FORKLIFTS DON’T TAKE VACATION DAYS.”

Butch - 360 Technician, ProLift, Cincinnati, Ohio



## HELP IS ALWAYS HERE WITH TOYOTA 360 SUPPORT.

The industry’s best and most comprehensive dealer network quickly delivers Toyota Certified Technicians to your work site. These specially trained technicians can also help assess your warehouse and facility needs to recommend the right equipment for the job. And with the largest fleet of material handling equipment, Toyota 360 keeps your business running at full speed.

[ToyotaForklift.com/360-Support](http://ToyotaForklift.com/360-Support)



**YOUR BUSINESS IS RIDING ON IT.**

Some product features described herein are optional. Please consult your dealer for specifications. Details of specifications and equipment are based on information available at time of printing and may change without notice. Photos may not reflect physical trucks.

