

LARGE IC PNEUMATIC



13500 - 17500 LBS.

SPECIFICATIONS



8FDU60-80

CLASS
5

INTERNAL COMBUSTION ENGINE PNEUMATIC TIRE

ToyotaForklift.com

LARGE IC PNEUMATIC

CAPACITY
13500 - 17500 LBS.

MAXIMUM FORK HEIGHT
239 IN.

LOAD CENTER
24 IN.

INDUSTRIES



Brick, Block
& Pipe



Distribution



Factory



General
Manufacturing



Lumber



Retail

STANDARD FEATURES

DURABILITY

- Control Area Network (CAN-bus) communication
- Fully stamped steel side panels
- Full-floating front axle
- Moisture-resistant electric connectors
- Limited free-lift 2-stage mast (V)
- High cooling capacity radiator
- Tilt cylinder boots
- Low-maintenance battery
- Large-capacity engine-cooling fan
- 8" cyclone air cleaner
- Plate-iron front fenders
- Anti-restart ignition key switch
- Stamped steel engine hood
- Radiator screen
- External hydraulic oil cooler
- Force-cooled wet disc brakes
- Fully oil charged lift cylinder

SUPPORT

- System of Active Stability™ (SAS)
- Operator Presence Sensing System (OPSS)
- Bolt-on overhead guard
- Key lowering interlock
- Electric horn
- Neutral start safety switch
- Asbestos-free components
- Orange forks
- LED headlights
- One-way automatic fork leveling
- Key off/headlight off system
- Speed control

PERFORMANCE

- EPA/CARB-certified engine
- UL "D" diesel engine
- Toyota 4-cylinder, 3.0 liter, DOHC Tier 4 Final (Diesel Oxidation Catalyst) diesel engine (1KD)
- 2 speed automatic (powershift) transmission
 - 2FWD/2REV speeds
 - Electronically controlled
- LCD multi-function display - includes:
 - Data log, fuel, and operation information with QR code output
 - Master warning, wheel, direction, and mast tilt indicators
 - Various hours meters
 - Engine coolant temperature gauge
 - Fuel gauge
 - Check engine light
 - Engine oil pressure warning light
 - OPSS activation light
 - Parking brake indicator
 - SAS/OPSS warning light

ERGONOMICS

- 11.8"-dia., two-spoke steering wheel
- Load-sensing power steering
- One-way automatic fork leveling
- Double-action parking brake (hand)
- Integrated headlight & turn signal lever
- Cowl-mounted hydraulic control levers with rubber boot covers
- 12"-long dual operator assist grips
- Low, wide entry steps
- Dash-integrated amenity tray & oversized cup holder
- Premium Comfort Seat
- Non-cinching seatbelt

SERVICEABILITY

- Easy-access no tools required floorboard
- Engine hood assist damper with lock device
- Engine protection system
- Air cleaner discharge valve
- Easy-lift engine hood with wide 75° opening
- Easy access to common service items such as filters & dipsticks



TRUCK SPECIFICATIONS


MODEL NUMBERS

GENERAL DATA				8FD60U	8FD70U	8FD80U	
Load Capacity	lb (kg)			13500 (6000)	15500 (7000)	17500 (8000)	
Power Type				Diesel	Diesel	Diesel	
Operator Position				Seated Rider	Seated Rider	Seated Rider	
Tire Type	Front / Rear			Pneumatic / Pneumatic	Pneumatic / Pneumatic	Pneumatic / Pneumatic	
Wheels (x = driven)	Front / Rear			4x / 2	4x / 2	4x / 2	
EXTERIOR DIMENSIONS				8FD60U	8FD70U	8FD80U	
A Maximum Fork Height (top of forks)	in (mm)			120.5 (3060)	120.6 (3065)	120.8 (3070)	
B Free-Lift (top of forks)	in (mm)			4.9 (125)	4.9 (125)	5.1 (130)	
C Fork Size (T x W x L)	in (mm)			2.4 x 6 x 48 (60 x 150 x 1220)	2.6 x 6 x 48 (65 x 150 x 1220)	2.8 x 6 x 48 (70 x 150 x 1220)	
D Fork Spread Max. / Min. (outer edge to edge)	in (mm)			66.9 / 11.8 (1700 / 300)	66.9 / 11.8 (1700 / 300)	66.9 / 11.8 (1700 / 300)	
E Tilt Range (forward / backward)	deg			6 / 12	6 / 12	6 / 12	
F Length to Fork Face	in (mm)			137.4 (3490)	139.6 (3545)	141.3 (3590)	
G Overall Width	in (mm)			78.5 (1995)	78.5 (1995)	78.5 (1995)	
H Mast Lowered Height	in (mm)			96.8 (2460)	96.8 (2460)	102.8 (2610)	
I Mast Extended Height (top of load backrest)	in (mm)			174.6 (4435)	174.6 (4435)	174.8 (4440)	
J Overhead Guard Height	in (mm)			90.9 (2310)	90.9 (2310)	90.9 (2310)	
K Turning Radius (inside / outside)	in (mm)			127 (3230)	129 (3280)	130.5 (3320)	
L Load Distance ¹	in (mm)			22.8 (580)	23 (585)	23.2 (590)	
M Basic Right-Angle Stacking Aisle Width	in (mm)			150 (3810)	152 (3870)	154 (3910)	
PERFORMANCE DATA				8FD60U	8FD70U	8FD80U	
Speeds	Maximum Travel (forward / reverse)	Full Load	mph (km/h)	11.8 (19.0) / 11.8 (19.0)	11.8 (19.0) / 11.8 (19.0)	11.8 (19.0) / 11.8 (19.0)	
		No Load	mph (km/h)	13.0 (21.0) / 13.0 (21.0)	13.0 (21.0) / 13.0 (21.0)	13.0 (21.0) / 13.0 (21.0)	
	Lifting	Full Load	fpm (mm/sec)	81 (410)	81 (410)	73 (370)	
		No Load	fpm (mm/sec)	87 (440)	87 (440)	87 (440)	
	Lowering	Full Load	fpm (mm/sec)	104 (530)	104 (530)	104 (530)	
		No Load	fpm (mm/sec)	94 (480)	94 (480)	94 (480)	
Drawbar Pull	Maximum	Full Load	lb (kg)	10350 (4700)	10350 (4700)	10150 (4600)	
		No Load	lb (kg)	4730 (2150)	4520 (2050)	4480 (2030)	
Gradeability	1 mph (1.5 km/h) ¹	Full Load	%	25	22	19	
		Maximum ¹	Full Load	%	34	30	26
			No Load	%	24	21	19
TRUCK WEIGHTS				8FD60U	8FD70U	8FD80U	
Total Weight	lb (kg)			18850 (8560)	20300 (9220)	22180 (10070)	
Weight Distribution	Full Load (front / rear)	lb (kg)		28720 (13030) / 3360 (1530)	31800 (14430) / 3940 (1790)	35170 (15960) / 4640 (2110)	
	No Load (front / rear)	lb (kg)		8540 (3880) / 10310 (4680)	8230 (3740) / 12070 (5480)	8210 (3730) / 13970 (6340)	
TIRES				8FD60U	8FD70U	8FD80U	
Tires	Number (front / rear)			4 / 2	4 / 2	4 / 2	
	Size	Front		8.25-15-12PR	8.25-15-14PR	8.25-15-14PR	
		Rear		8.25-15-12PR	8.25-15-14PR	8.25-15-14PR	
Wheelbase	in (mm)			88.6 (2250)	88.6 (2250)	88.6 (2250)	
Tread Width (front / rear)	in (mm)			57.9 (1470) / 57.5 (1460)	57.9 (1470) / 57.5 (1460)	57.9 (1470) / 57.5 (1460)	
Underclearance (full load)	Minimum with Load	in (mm)		4.9 (125)	4.9 (125)	4.9 (125)	
	Center of Wheelbase	in (mm)		9.8 (250)	9.8 (250)	9.8 (250)	
Brake	Service (foot) / Parking			Hydraulic <wet> / Hand	Hydraulic <wet> / Hand	Hydraulic <wet> / Hand	
POWER SYSTEM				8FD60U	8FD70U	8FD80U	
Battery (5-hour rating)	V / Ah			12 / 70	12 / 70	12 / 70	
Internal Combustion Engine	Make / Model			TOYOTA 1KD	TOYOTA 1KD	TOYOTA 1KD	
	Rated Horsepower @ rpm	SAE HP		74 @ 2200	74 @ 2200	74 @ 2200	
		(kW)		(55 @ 2200)	(55 @ 2200)	(55 @ 2200)	
	Rated Torque @ rpm	SAE ft-lb		220 @ 1200 - 1500	220 @ 1500	220 @ 1200 - 1500	
		(N-m)		(300 @ 1200 - 1500)	(300 @ 1200 - 1500)	(300 @ 1200 - 1500)	
	Number of Cylinders			4	4	4	
Piston Displacement	cu in (cc)			182 (2982)	182 (2982)	182 (2982)	
Fuel Tank Capacity	US gal (liter)			34 (130)	34 (130)	34 (130)	
Transmission	Type			Powershift	Powershift	Powershift	
	Speeds (forward / reverse)			2 / 2	2 / 2	2 / 2	
Auxiliary Hydraulic Function Specifications (for attachments) ²	Max. Operating Pressure	psi (kg/cm ²)		2990 (210)	2990 (210)	2990 (210)	
	Max. Flow Rate	gpm (lpm)		33.8 (128)	33.8 (128)	33.8 (128)	

¹ Computed values.

² Values taken at Hydraulic Control Valve. Does not take in to consideration losses through mast plumbing (hosing, fittings, QDs, etc.).

EXTERIOR DIMENSIONS

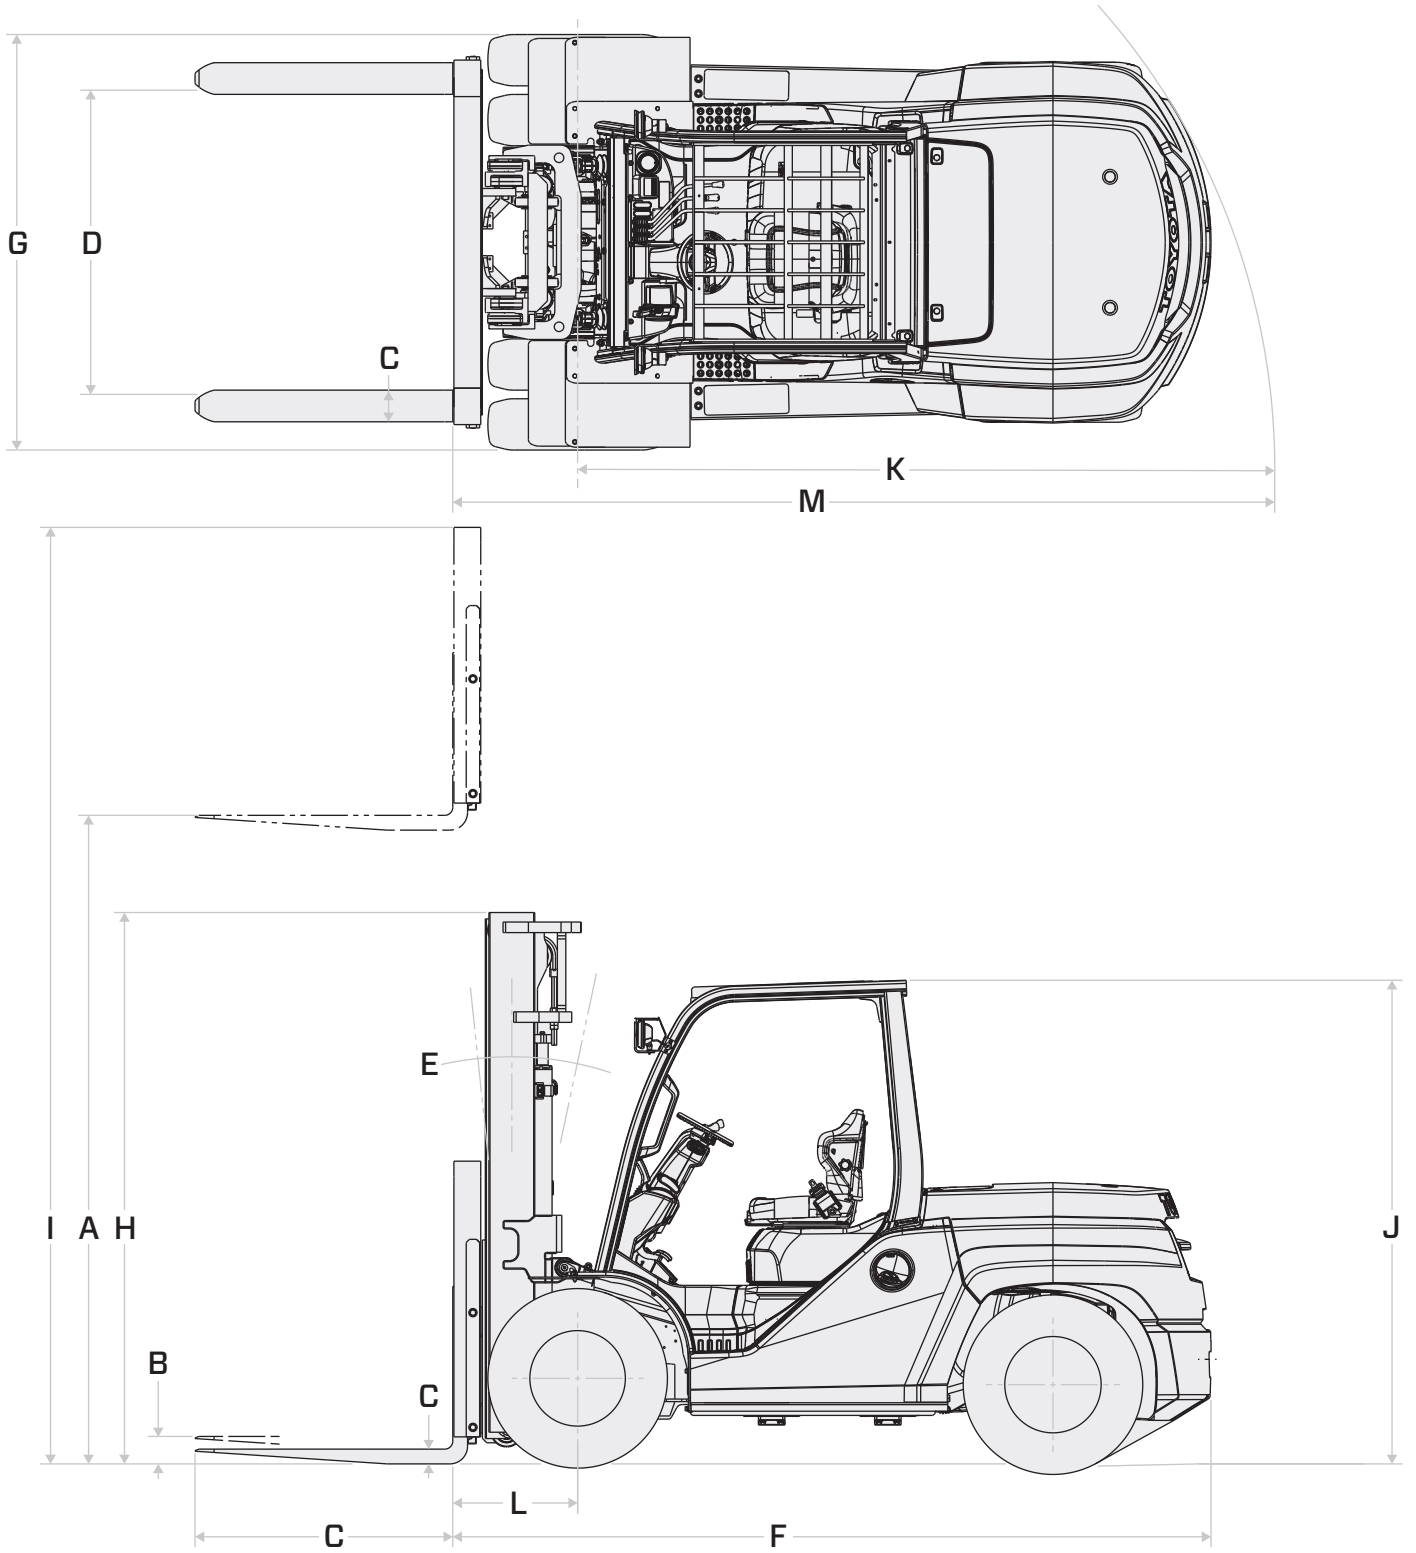

MAST SPECIFICATIONS

MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT			FREE-LIFT		TILT RANGE		LOAD CAPACITY AT 24 IN. (610 MM) LOAD CENTER
		LOWERED	EXTENDED		WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST ¹	FWD	BWD	
			WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST ¹					
	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	deg	deg	lb (kg)
8FD60U									
Wide Visible (V)	120.5 (3065)	96.9 (2460)	156.7 (3980)	174.6 (4435)	4.9 (125)	4.9 (125)	6	12	13500 (6000)
	132.5 (3365)	102.8 (2610)	168.5 (4280)	186.4 (4735)	4.9 (125)	4.9 (125)	6	12	13500 (6000)
	140.5 (3565)	106.7 (2710)	176.4 (4480)	194.3 (4935)	4.9 (125)	4.9 (125)	6	12	13500 (6000)
	148 (3765)	110.6 (2810)	184.3 (4680)	202.2 (5135)	4.9 (125)	4.9 (125)	6	12	13500 (6000)
	179.5 (4565)	130.3 (3310)	215.8 (5480)	233.7 (5935)	4.9 (125)	4.9 (125)	6	12	13500 (6000)
	219 (5565)	150 (3810)	255.1 (6480)	273 (6935)	4.9 (125)	4.9 (125)	6	12	13500 (6000)
Full Free-Lift 3-Stage (FSV)	160 (4065)	92.9 (2360)	196.9 (5000)	214 (5435)	56.1 (1425)	39 (990)	6	6	13300 (6000)
	172 (4365)	96.9 (2460)	208.7 (5300)	225.8 (5735)	60 (1525)	42.9 (1090)	6	6	12900 (5850)
	187.5 (4765)	100.4 (2550)	224.4 (5700)	241.5 (6135)	63.6 (1615)	46.5 (1180)	6	6	12400 (5620)
	199.5 (5065)	110.6 (2810)	236.2 (6000)	253.4 (6435)	73.8 (1875)	56.7 (1440)	6	6	12110 (5500)
	219 (5565)	120.5 (3060)	255.9 (6500)	273 (6935)	83.7 (2125)	66.5 (1690)	6	6	11450 (5200)
	239 (6065)	122.4 (3110)	275.6 (7000)	292.7 (7435)	85.6 (2175)	68.5 (1740)	6	6	11450 (5200)

MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT			FREE-LIFT		TILT RANGE		LOAD CAPACITY AT 24 IN. (610 MM) LOAD CENTER
		LOWERED	EXTENDED		WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST ¹	FWD	BWD	
			WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST ¹					
	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	deg	deg	lb (kg)
8FD70U									
Wide Visible (V)	120.5 (3065)	96.9 (2460)	156.7 (3980)	174.6 (4435)	4.9 (125)	4.9 (125)	6	12	15500 (7000)
	132.5 (3365)	102.8 (2610)	168.5 (4280)	186.4 (4735)	4.9 (125)	4.9 (125)	6	12	15500 (7000)
	140.5 (3565)	106.7 (2710)	176.4 (4480)	194.3 (4935)	4.9 (125)	4.9 (125)	6	12	15500 (7000)
	148 (3765)	110.6 (2810)	184.3 (4680)	202.2 (5135)	4.9 (125)	4.9 (125)	6	12	15500 (7000)
	179.5 (4565)	130.3 (3310)	215.8 (5480)	233.7 (5935)	4.9 (125)	4.9 (125)	6	12	15500 (7000)
	219 (5565)	150 (3810)	255.1 (6480)	273 (6935)	4.9 (125)	4.9 (125)	6	12	14750 (6700)
Full Free-Lift 3-Stage (FSV)	160 (4065)	92.9 (2360)	196.9 (5000)	214 (5435)	56.1 (1425)	39 (990)	6	6	15500 (7000)
	172 (4365)	96.9 (2460)	208.7 (5300)	225.8 (5735)	60 (1525)	42.9 (1090)	6	6	14800 (6730)
	187.5 (4765)	100.4 (2550)	224.4 (5700)	241.5 (6135)	63.6 (1615)	46.5 (1180)	6	6	14750 (6700)
	199.5 (5065)	110.6 (2810)	236.2 (6000)	253.4 (6435)	73.8 (1875)	56.7 (1440)	6	6	14750 (6700)
	219 (5565)	120.5 (3060)	255.9 (6500)	273 (6935)	83.7 (2125)	66.5 (1690)	6	6	12700 (5750)
	239 (6065)	122.4 (3110)	275.6 (7000)	292.7 (7435)	85.6 (2175)	68.5 (1740)	6	6	12550 (5700)

MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT			FREE-LIFT		TILT RANGE		LOAD CAPACITY AT 24 IN. (610 MM) LOAD CENTER
		LOWERED	EXTENDED		WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST ¹	FWD	BWD	
			WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST ¹					
	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	deg	deg	lb (kg)
8FD80U									
Wide Visible (V)	121 (3070)	102.8 (2610)	160.8 (4085)	174.8 (4440)	5.1 (130)	5.1 (130)	6	12	17500 (8000)
	132.5 (3370)	106.7 (2710)	172.6 (4385)	186.6 (4740)	5.1 (130)	5.1 (130)	6	12	17500 (8000)
	140.5 (3570)	110.6 (2810)	180.5 (4585)	194.5 (4940)	5.1 (130)	5.1 (130)	6	12	17500 (8000)
	148.5 (3770)	120.5 (3060)	188.4 (4785)	202.4 (5140)	5.1 (130)	5.1 (130)	6	12	17500 (8000)
	180 (4570)	140.2 (3560)	219.9 (5585)	233.9 (5940)	5.1 (130)	5.1 (130)	6	12	17500 (8000)

¹ Height of standard load backrest is 54" (1370 mm).
NOTE: Mast will be removed for delivery if overall lowered height is greater than 106" (2692 mm).



TOYOTA

TOYOTA



“I’M HERE TO MAKE SURE YOUR FORKLIFTS DON’T TAKE VACATION DAYS.”

Butch - 360 Technician, ProLift, Cincinnati, Ohio



HELP IS ALWAYS HERE WITH TOYOTA 360 SUPPORT.

The industry’s best and most comprehensive dealer network quickly delivers Toyota Certified Technicians to your work site. These specially trained technicians can also help assess your warehouse and facility needs to recommend the right equipment for the job. And with the largest fleet of material handling equipment, Toyota 360 keeps your business running at full speed.

ToyotaForklift.com/360-Support



YOUR BUSINESS IS RIDING ON IT.

Some product features described herein are optional. Please consult your dealer for specifications. Details of specifications and equipment are based on information available at time of printing and may change without notice.

