C-SERIES C10,000 XL-C12,000 XL

COMBilift

LiFTING INNOVATION

The multi-directional forklift designed for the safe, space saving and productive handling of long and bulky loads.













C-SERiES C10,000 XL-C12,000 XL

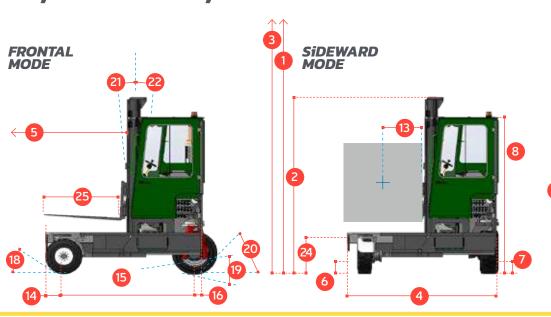



REF.	DESCRIPTION	C10 000 XI	C12 000 XI	
1a	Standard Lift Height	C10,000 XL C12,000 XL 159"		
1b	Free Lift Height	0"		
2	Height Mast Closed	118"		
3	Max. (Mast Raised)	197"		
4	Overall Length	98" 104"		
5	Mast Travel	53"	55"	
6	Ground Clearance Under Mast	11"		
7	Ground Clearance to Wheelbase Center	101/2"		
8	Height Over Cab or of Overhead Guard	102"		
9	Width	88"		
10	Outside Spread of Fork Arms	53"		
11	Track Front	78"		
12	Frame Opening	55"		
13	Load Center Distance	24"		
14	Overhang Front	11½"		
15	Wheel Base	811/2"		
16	Overhang Back	5½"		
17	Length from Face of Fork	51"	53"	
18	Approach Angle	45°		
19	Ramp Angle	29°		
20	Departure Angle	45°		
21	Forward Tilt	3°		
22	Backward Tilt	5°		
23	Minimum Outside Radius	98"		
24	Platform Height	27"		
25	Platform Length	47"	51"	
	e t	40.000.11	40.000.11	

Α	Capacity	10,000 lbs	12,000 lbs	
В	Unladen Weight	15,000 lbs	17,000 lbs	
C	Maximum Ground Speed	9 mph		
D	Gradeability	15%		
E	3 ltr GM LPG	65 HP		
F	Electrics	12 Volt		
G	Fork Section	2" x 6" x 47"		
Н	23 x 10 - 12 Front Tire	OD 23" / Width 10"		
- 1	28 x 12.5 - 15 Rear Tire	OD 28" / Width 11"		
J	Standard Color	Green and Gray		
K	Suspension Seat	KAB Model 116		

 $International\ Patent\ Application\ No.\ PCT/Ep2014/053066;\ UK\ Patent\ Application\ No.\ GB\ 1302811.3$

Multi-Directional



Features Include:

- Rubber Mounted Half Open Cabin
- Multi-Direction Operation
- 3 Wheel Hydrostatic Drive
- Load Sensing Steering
- 4 Way Lever Positioning of Wheels
- · Hydraulic Oil Cooler

Distributed by:

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.