COMBi-GT 6,000

COMBILIFT
LIFTING INNOVATION

The multi-directional forklift designed for the safe, space saving and productive handling of long and bulky loads.












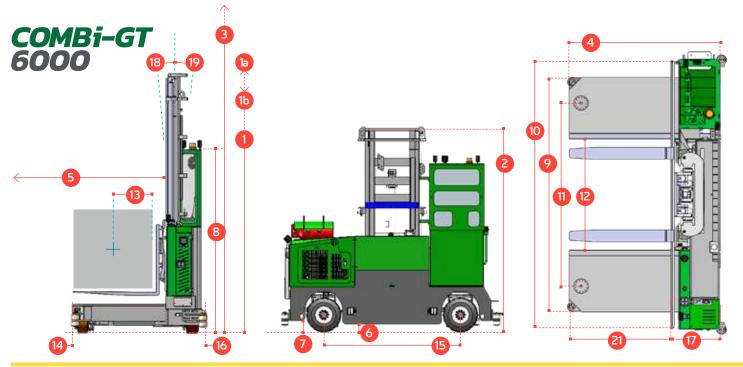

REF.	DESCRIPTION				C6,000 (iΤ		
1a	Lift Height				248"			
1b	Free Lift Height				104"			
2	Height Mast Closed				157"			
3	Max. Mast Raised				303"			
4	Overall Length	50"	56"	62"	68"	74"	80"	86"
5	Mast travel	26"	32"	38"	44"	50"	56"	62"
6	Ground Clearance Under Mast				5"			
7	Ground Clearance to Center of Wheelbase				5"			
8	Height Over Cab (without work lights)				112"			
9	Width Across Platforms				116"			
10	Outside Spread of Fork Arms	131½"						
11	Wheelbase	90½"						
12	Frame Opening				55"			
13	Load Center Distance	12"	15"	18"	21"	24"	24"	24"
14	Overhang Front				6"			
15	Track	38"	44"	50"	56"	62"	68"	74"
16	Overhang Back				6"			
17	Length from Face of Fork				26"			
18	Forward Tilt	3°						
19	Backward Tilt				4½°			
20	Platform Height (with front lowered)				161/2"			
21	Platform Length	24"	30"	36"	42"	48"	54"	60"
Α	Capacity				6,000 lbs			
В	Unladen Weight	19 000 lbs	10 E00 lbs	10 000 lb	s 19,500 lbs		20 E00 lbs	21 000 lba
С	Maximum Ground Speed	10,000 (05	10,500 (05	19,000 10	7½ mph		20,500 (05	21,000 (05
D	Gradeability				10%			
E	3 ltr GM LPG				65 HP			
F	Electrics				12 Volt			
G	Fork Section 2" x 6" x	24"	30"	36"	42"	48"	54"	60"
Н	350 / 150 - 280 Front Tire (Solid) x2	24	30	30) 3 4	60
	16 x 7 - 12 Rear Tire (Super Elastic) x2	OD 14" / Width 6" OD 23" / Width 10"						
		Green & Gray						
J	Standard Color	I			Green & Gr	ay		

Distributed by:

Features Include:

- · Rubber Mounted Overhead Guard
- 4 Wheel Steering
- Load Sensing Steering
- 2 Wheel Hydrostatic Drive
- Tilting Chassis +/- 1/2" at front
- · Hydraulic Oil Cooler

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.