



**LIFT-A-LOFT** MP SERIES

# MANUAL POSITIONED LIFT

LIFT-A-LOFT has 5 standard models of the Manually Positioned lifting platforms. The MP lends itself to various engineered special order items that have been produced over the years. These units could either be stationary or mobile, according to the needs of the final consumer.

**MP STANDARD** (shown with optional Extenda-deck)



**MP SPECIAL ORDER**



Lift-A-Loft's MP maintenance platform was developed from the most proven design in scissor mechanisms, hydraulic systems, and safety devices. The platform with Extenda-Deck (opt) and base mounted stabilizers is ideal for accessing hard-to-reach structures with maximum safety. Positioning is done manually (or in many cases the unit is special ordered as a stationary lifting device), while raising or lowering is powered by 110VAC (Std), 24VDC battery pack, or high pressure air (100psi and 100cfm.)

## PERFORMANCE SPEC.

- 110VAC – 20 Amps Required for Power Supply
- Lift/Lower Speeds 0.50 ft/sec (0.15 m/sec)\*
- \*Lift/Lower speed may vary according to load and conditions.
- Scissor Spreader

## SAFETY FEATURES


- Self Closing, Self Latching Gate
- Lanyard Attachment Points
- Non-skid Flooring on Foot Traffic Areas
- Emergency Lowering Controls at Ground Level
- 39" (0.99 m) High Guardrails

## FEATURES

- 8" (0.2m) Lockable Swivel Casters
- Four Adjustable Outriggers
- Pinned – Removable Guard Rails
- 110 VAC Circuit to Platform

## OPTIONAL EQUIPMENT

- Flashing or Rotating Warning Lights
- Extenda-deck Front or Side Platform Extension
- 110VAC, 24VDC, or Air Powered Units
- Towing Tongue
- Flotation Tires
- Platform Mounted Work Lights
- Motion Alarm
- Air Line to Platform
- Custom Paint
- Padded Rails
- Call LIFT-A-LOFT for Custom Designed Units

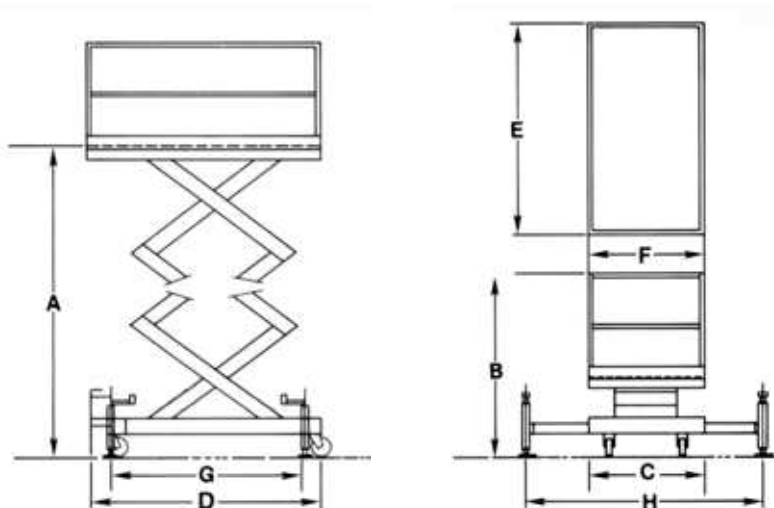

MODEL	A MAXIMUM PLATFORM HT.	B TRAVEL HEIGHT	C BASE WIDTH	D BASE LENGTH	E PLATFORM LENGTH	F PLATFORM WIDTH	GXH OUTRIGGER PATTERN	PLATFORM CAPACITY	APPROX. SHIPPING WT.
MP31-10	31'0' (9.45m)	7'0"** (2.13m)	45' (1.14m)	111. (2.82m)	101' (2.57m)	45' (1.14m)	7'11" X 10'2" (2.41 X 3.10m)	1,000 lbs. (453.6kg)	3,860 lbs. (1,750.8 kg)
MP25-15	25'3' (7.70m)	6'6"** (1.98m)	45' (1.14m)	111. (2.82m)	101' (2.57m)	45' (1.14m)	7'11" X 10'2" (2.41 x 3.10m)	1,500 lbs. (680.4kg)	3,485 lbs. (1,580.7 kg)
MP24-10	23'8" (7.21m)	6'7"** (2.00m)	31" (.79m)	86" (2.18m)	75"** (1.91m)	30"** (.76m)	6'3" X 8'0" (1.91 x 2.44m)	1,000 lbs. (453.6kg)	2,950 lbs. (1,338 kg)
MP19-15	19'6" (5.94m)	6'3"** (1.91m)	31" (.79m)	86" (2.18m)	75"** (1.91m)	30"** (.76m)	6'3" X 8'0" (1.91 x 2.44m)	1,500 lbs. (680.4kg)	2,360 lbs. (1,070.4 kg)
MP15-10	15'0" (4.57m)	5'11"** (1.80m)	31' (.79m)	86' (2.18m)	75"** (1.91m)	30"** (.76m)	6'3" X 8'0" (1.91 x 2.44m)	1,000 lbs. (453.6kg)	2,000 lbs. (907.1 kg)

\*\*Includes 39' (.99m) Pinned, Removable Guardrails

## CAPACITY WITH EXTENDA-DECK ROLLOUT PLATFORM EXTENSION

	MP31-10		MP25-15		MP24-10		MP19-15		MP15-10	
	MAIN PLAT.	EXTENSION	MAIN PLAT.	EXTENSION	MAIN PLAT.	EXTENSION	MAIN PLAT.	EXTENSION	MAIN PLAT.	EXTENSION
EXTENDED	—	700 lbs. (317.5kg)	500 lbs. (226.8kg)	700 lbs. (317.5kg)	—	700 lbs. (317.5kg)	500 lbs. (226.8kg)	700 lbs. (317.5kg)	100 lbs. (45.4kg)	700 lbs. (317.5kg)
RETRACTED	700 lbs. (317.5kg)	—	1200 lbs. (544.3kg)	—	700 lbs. (317.5kg)	—	1200 lbs. (544.3kg)	—	800 lbs. (362.9kg)	—
PLATFORM SIZE W/ EXTENDA- DECK™	45" X 149" (1.14 x 3.78cm)		45" X 149" (1.14m x 3.78m)		30" X 123" (.76 x 3.12m)		30" X 123" (.76 x 3.12m)		30" X 123" (.76 x 3.12m)	